

AVP 385

Volvo Penta
Mecc Alte
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$%



2000/14/EC

&\$\$\$#(#

z) \$ z' z' D:

	"	kw	"	kw	Amp
400/230	385,00	308,00	350,00	280,00	505,20

fPGE

GC,) &

,) & z

fDF DE

%\$1

% %&

GC" \$(**

z&(

GC

Standard Specifications

z

fl

E

z

z

ALTERNATOR

D: A Z 5J F

TRANSFER SWITCH

AVP 385

Volvo Penta
Mecc Alte
D+' &'



Manufacturer	Volvo Penta		
Model	TAD1342GE		
		% \$ \$ ' "# "	
		343,00 kw [466,00HP]	
	L	12,780	
	"	131X158	
		18,1:1	
	fl # 7	"# "	1500
	fl 7	L	36,00
		L	44,00
AbsorbedAirDischargeReSourceKey.Text	' # "	25,90	
	' # "	408,00	
		24 V d.c.	
	Load	% \$ \$ i	'+) i
	# ") \$ i	
		70,30	53,30 37,00

		Mecc Alte
		ECO38 3L/4
	Hz	50
	"	350,00
7cg		0,80
		3
	fl 7	400/230
	A	505,00

		fl 7		fl 7	
	"	"	"	"	L
AVP 385		3048,00	1550,00	1855,00	700,00
		fl 7		fl 7	
	"	"	"	"	L
MS 70	3940	4460	1606	2477	700

D+' &'

!



AVP 385

Volvo Penta
Mecc Alte
D+ &



f@#@Bt
f@#@@t

"z" "z" "z"

f@#@Bt

971

#

#

#

#



f&%) +t

f&)(, t

f&%) \$t

6G'9B '*\$-\$)

6G'9B '*%\$\$\$!*!&

6G'9B '*%\$\$\$!*!(

#



ž

%, !&*(

&(\$)

ž

ž


GA 8

!&+""

ž

AVP 385

Volvo Penta
Mecc Alte
D+ &

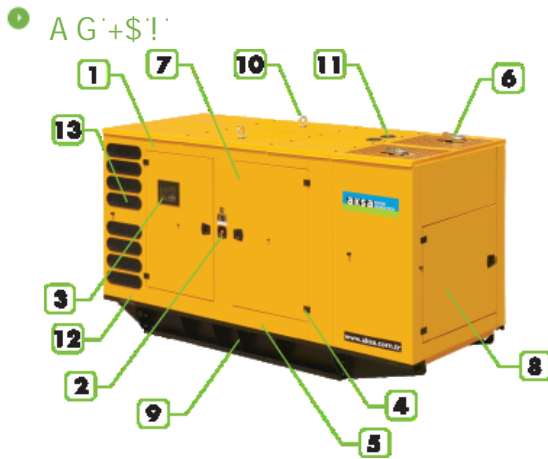

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	4460
fl "L	"	2477
	L	700